


ASME B16.20 SPIRAL WOUND GASKETS DIMENSIONS CLASS 300 FOR RAISED FACE FLANGES ASME B16.5

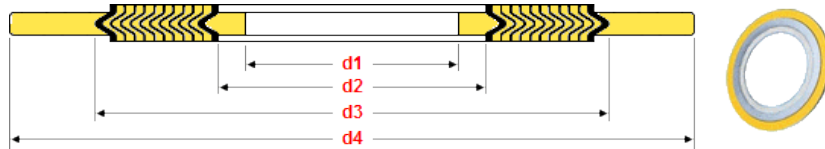

NPS	Inner Ring	Sealing Element		Outer Ring
	d1	d2	d3	d4
1/2	14.2	19.1	31.8	54.1
3/4	20.6	25.4	39.6	66.8
1	26.9	31.8	47.8	73.2
1¼	38.1	47.8	60.5	82.6
1½	44.5	54.1	69.9	95.3
2	55.6	69.9	85.9	111.3
2½	66.5	82.6	98.6	130.3
3	81	101.6	120.7	149.4
4	106.4	127	149.4	181.1
5	131.8	155.7	177.8	215.9
6	157.2	182.6	209.6	251
8	215.9	233.4	263.7	308.1
10	268.2	287.3	317.5	362
12	317.5	339.9	374.7	422.4
14	349.3	371.6	406.4	485.9
16	400.1	422.4	463.6	539.8
18	449.3	474.7	527.1	596.9
20	500.1	525.6	577.9	654.1
24	603.3	628.7	685.8	774.7

- All Dimensions are in millimeters unless otherwise indicated.
- Thickness of inner and outer ring: 2.97 mm - 3.33 mm.
- Thickness sealing element: 4.45 mm