


ASME B16.20 SPIRAL WOUND GASKETS DIMENSIONS CLASS 600 FOR RAISED FACE FLANGES ASME B16.5

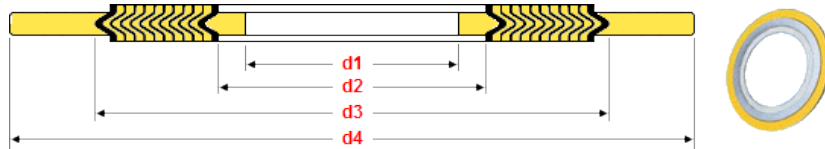

NPS	Inner Ring	Sealing Element		Outer Ring
	d1	d2	d3	d4
1/2	14.2	19.1	31.8	54.1
3/4	20.6	25.4	39.6	66.8
1	26.9	31.8	47.8	73.2
1¼	38.1	47.8	60.5	82.6
1½	44.5	54.1	69.9	95.3
2	55.6	69.9	85.9	111.3
2½	66.5	82.6	98.6	130.3
3	78.7	101.6	120.7	149.4
4	102.6	120.7	149.4	193.8
5	128.3	147.6	177.8	241.3
6	154.9	174.8	209.6	266.7
8	205.7	225.6	263.7	320.8
10	255.3	274.6	317.5	400.1
12	307.3	327.2	374.7	457.2
14	342.9	362	406.4	492.3
16	389.9	412.8	463.6	565.2
18	438.2	469.9	527.1	612.9
20	489	520.7	577.9	682.8
24	590.6	628.7	685.8	790.7

- All Dimensions are in millimeters unless otherwise indicated.
- Thickness of inner and outer ring: 2.97 mm - 3.33 mm.
- Thickness sealing element: 4.45 mm