


ASME B16.20 SPIRAL WOUND GASKETS DIMENSIONS CLASS 150 FOR RAISED FACE FLANGES ASME B16.5

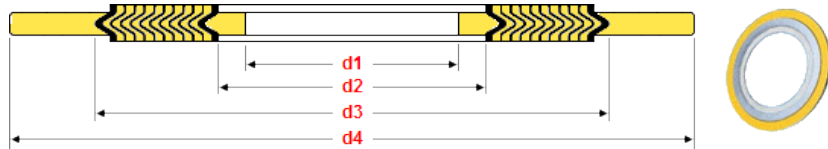

NPS	Inner Ring	Sealing Element		Outer Ring
	d1	d2	d3	d4
1/2	14.2	19.1	31.8	47.8
3/4	20.6	25.4	39.6	57.2
1	26.9	31.8	47.8	66.8
1¼	38.1	47.8	60.5	76.2
1½	44.5	54.1	69.9	85.9
2	55.6	69.9	85.9	104.9
2½	66.5	82.6	98.6	124
3	81	101.6	120.7	136.7
4	106.4	127	149.4	174.8
5	131.8	155.7	177.8	196.9
6	157.2	182.6	209.6	222.3
8	215.9	233.4	263.7	279.4
10	268.2	287.3	317.5	339.9
12	317.5	339.9	374.7	409.7
14	349.3	371.6	406.4	450.9
16	400.1	422.4	463.6	514.4
18	449.3	474.7	527.1	549.4
20	500.1	525.5	577.9	606.6
24	603.3	628.7	685.8	717.6

- All Dimensions are in millimeters unless otherwise indicated.
- Thickness of inner and outer ring: 2.97 mm - 3.33 mm.
- Thickness sealing element: 4.45 mm