


ASME B16.20 SPIRAL WOUND GASKETS DIMENSIONS CLASS 900 FOR RAISED FACE FLANGES ASME B16.5

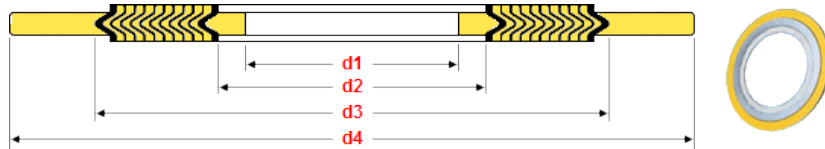

NPS	Inner Ring	Sealing Element		Outer Ring
	d1	d2	d3	d4
1/2	14.2	19.1	31.8	63.5
3/4	20.6	25.4	39.6	69.9
1	26.9	31.8	47.8	79.5
1¼	33.3	39.6	60.5	88.9
1½	41.4	47.8	69.9	98.6
2	52.3	58.7	85.9	143
2½	63.5	69.9	98.6	165.1
3	78.7	95.3	120.7	168.4
4	102.6	120.7	149.4	206.5
5	128.3	147.6	177.8	247.7
6	154.9	174.8	209.6	289.1
8	196.9	222.3	257.3	358.9
10	246.1	276.4	311.2	435.1
12	292.1	323.9	368.3	498.6
14	320.8	355.6	400.1	520.7
16	374.7	412.8	457.2	574.8
18	425.5	463.6	520.7	638.3
20	482.6	520.7	571.5	698.5
24	590.6	628.7	679.5	838.2

General notes:

- All Dimensions are in millimeters unless otherwise indicated.
- Thickness of inner and outer ring: 2.97 mm - 3.33 mm.
- Thickness sealing element: 4.45 mm