


ASME B16.20 SPIRAL WOUND GASKETS DIMENSIONS CLASS 1500 FOR RAISED FACE FLANGES ASME B16.5

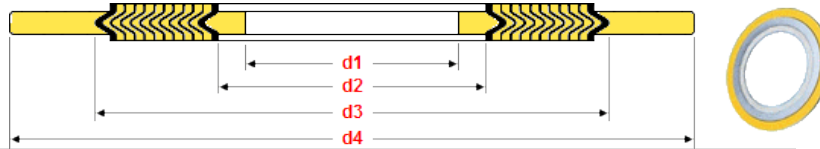

NPS	Inner Ring	Sealing Element		Outer Ring
	d1	d2	d3	d4
1/2	14.2	19.1	31.8	63.5
3/4	20.6	25.4	39.6	69.9
1	26.9	31.8	47.8	79.5
1.1/4	33.3	39.6	60.5	88.9
1.1/2	41.4	47.8	69.9	98.6
2	52.3	58.7	85.9	143
2.1/2	63.5	69.9	98.6	165.1
3	78.7	92.2	120.7	174.8
4	97.8	117.6	149.4	209.6
5	124.5	143	177.8	254
6	147.3	171.5	209.6	282.7
8	196.9	215.9	257.3	352.6
10	246.1	266.7	311.2	435.1
12	292.1	323.9	368.3	520.7
14	320.8	362	400.1	577.9
16	374.7	406.4	457.2	641.4
18	425.5	463.6	520.7	704.9
20	476.3	514.4	571.5	755.7
24	577.9	616	679.5	901.7

- All Dimensions are in millimeters unless otherwise indicated.
- Thickness of inner and outer ring: 2.97 mm - 3.33 mm.
- Thickness sealing element: 4.45 mm